



Color Options

- Black
- White





Standard Features

- Single boiler system
- Pre-infusion technology
- Quarter-turn steam knobs
- Raised groups (up to 20oz cup) & barista downlights
- 6 programable, volumetric dosing touch pads
- Temperature stabilized groups (thermosiphoned)
- Cup warmer
- Auto wash cycle
- Digital pressure stat
- LED light enabled side panels
- Touch screen display & functionality
- Shot timers
- Hot water dispenser with cool-water mixing valve

Additional Cost Features

- Auto-steam
- Multicolor, LED lit side panels
- Cool Touch Steam Wands




	SAE 2 	SAE 3 
Total Wattage	4,800 watt	5,350 watt
Heating Element	4,400 watt	5,000 watt
Boiler	9 ltr	14.7 ltr
Net Weight	181 lbs	218 lbs
Approx Ship Weight	260 lbs	300 lbs
Measurements W x D x H	32.9" x 22.9" x 22.6"	42.1" x 22.9" x 22.6"
Power	220 volt/20.9 amps	220 volt/ 23.2 amps
	 Nema L6-30	 Nema L6-30

Water Requirements

- 3/8" dedicated cold water line with shut off valve and compression fitting
- water hardness must be between 3-5 grains per gallon or 50-85 ppm
- water softener and/or filter must be installed if it exceeds the limits
- Minimum incoming water flow rate of 35 GPH and the maximum line pressure of 70 PSI / 5 BAR

Drain Requirements

- Open gravity drain of minimum 1.25 inches within 4 feet of the machine

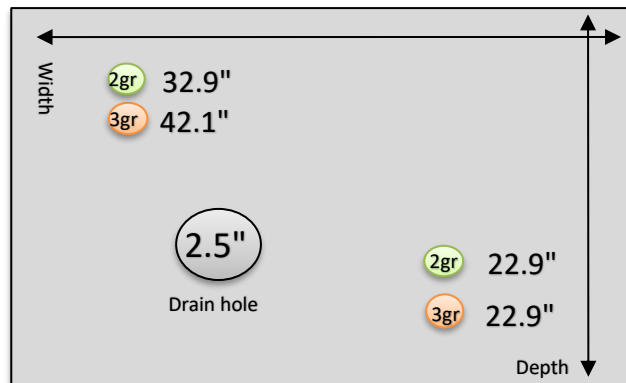

*Updated 3/2020