



Provided by:  
 Voltage Coffee Supply  
 Free shipping - Free Installation  
 Satisfaction Guaranteed!  
 720-441-1962  
 info@voltagesupply.com

# Tempesta Fact Sheet





## Color Options

- Black with chrome trim
- White with chrome trim

## Standard Features

- Multi-boiler system
- Super Dry steam system
- Lever graduated steam taps
- Adjustable pre-infusion per dose
- Raised groups (adjustable with tools)
- Downlights with adjustable dimmer
- Independent group touch screen displays
- Temperature stabilized groups (electronic)
- Electronic steam and group boiler controls
- Up to 6 volumetric doses per group
- Cup warmer
- Auto wash cycle
- Anti-scald steam wands
- Greenline energy saving settings
- Brew boiler temperature controls to the 0.1 degree
- Hot water dispenser with cool-water mixing valve




	2 Group 	3 Group 
Total Wattage	4,800 watt	6,400 watt
Steam Boiler Element	3,000 watt	4,000 watt
Group Boiler Element	1,000 watt x 2	1,000 watt x 3
Steam/Group Boilers	8.5/1.2/1.2 ltr	8.5/1.2/1.2/1.2 ltr
Net Weight	187lbs	231lbs
Approx Ship Weight	260 lbs	300 lbs
Measurements W x D x H	40.7 x 24.3 x 19.7	46.2 x 24.3 x 19.7
Power	220 volt/ 21.8 amps	220 volt/ 29.1 amps
	 Nema L6-30	 Nema L6-30

### Water Requirements

- 3/8" dedicated cold water line with shut off valve and compression fitting
- water hardness must be between 3-5 grains per gallon or 50-85 ppm
- water softener and/or filter must be installed if it exceeds the limits
- Minimum incoming water flow rate of 35 GPH and the maximum line pressure of 70 PSI / 5 BAR

### Drain Requirements

- Open gravity drain of minimum 1.25 inches within 4 feet of the machine

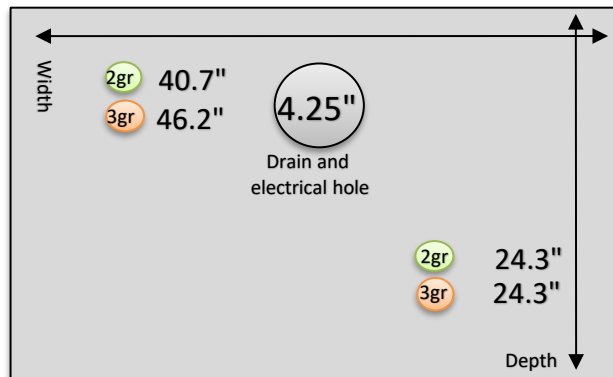

\*Updated 1/2020